

Coaxial Paint Hose*

Hosco Coaxial Paint hose is specially compounded to withstand today's modern paints and solvents and has far greater flexibility for ease and movement than conventional nylon paint hose. CPH hose features a three-layer extrusion of a nylon inner tube, a polyurethane middle layer, and a nylon jacket. It is smooth and seamless with a natural translucent color. It is used primarily at handgun stations to improve ergonomics.



HOSCO CPH - 4

PART NO.	DESCRIPTION	WORKING PRESSURE
CPH - 4	1/4" ID x .350 OD (6.35mm x 8.9mm)	200 PSI (14 BAR)
CPH - 6	3/8" ID x .500 OD (9.5mm x 12.7mm)	180 PSI (12 BAR)


*U.S. Patent No. 5,195,680 Other U.S., Canadian Patent No. 1,327,447
For use with Monoline Coaxial Paint Hose Assembly U.S. Patent No. 5,060,861

Paint Hose Clips

PART NO.	DESCRIPTION	FOR USE WITH
1414 - HC	Hose Clip	1/4" x 1/4" Nylon Paint Hose



PART NO.	DESCRIPTION	FOR USE WITH
HTC - 201 - 325	Hose Clip	1/8" & 3/16" ID Nylon Paint Hose
HTC - 326 - 400	Hose Clip	1/4" & 5/16" ID Nylon Paint Hose
HTC - 401 - 485	Hose Clip	5/16" & 3/8" ID Nylon Paint Hose

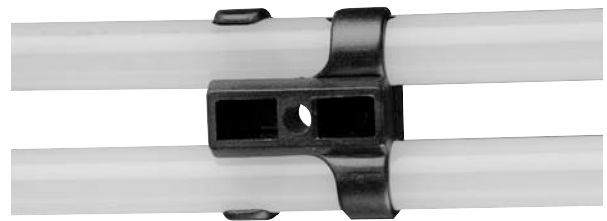

Hose & Tubing Cutter

The Hosco Hose & Tubing Cutter will provide straight, clean accurate cuts for optimum fitting connections. The lightweight, rugged unit will cut 1/8" through 3/4" OD tubing. The exclusive "blade guard" feature provides protection from accidental blade contact. Ribbed handle aides in accurate positioning on the tube.

PART NO.	DESCRIPTION
PXC058	Hose/Tubing Cutter

